


PROPOSED WORK – Jr. Sr. HS

BASEMENT


- A03. Seal existing fire rated walls - where found (Allowance)
- A04. Renovate locker rooms. Provide separate ADA compliant toilet with exterior access.
- A06. Renovate toilet rooms; faucets, dryers, fixtures etc.
- A07. Add tactile signage throughout the Building – To meet ADA Requirements (Corridor Only).
- A08. Replace water fountains. – 7 locations
- A15. Provide FinTube radiation at principal's conference room (RM 005).
- A27. Replace exterior doors. -20 leafs
- A28. Add lockdown hardware system at corridor doors - Building Wide
- A29. Provide AC at server room (RM 003)
- A30. Replace Fire Alarm System panel only, provide carbon monoxide detectors in spaces with fuel source.

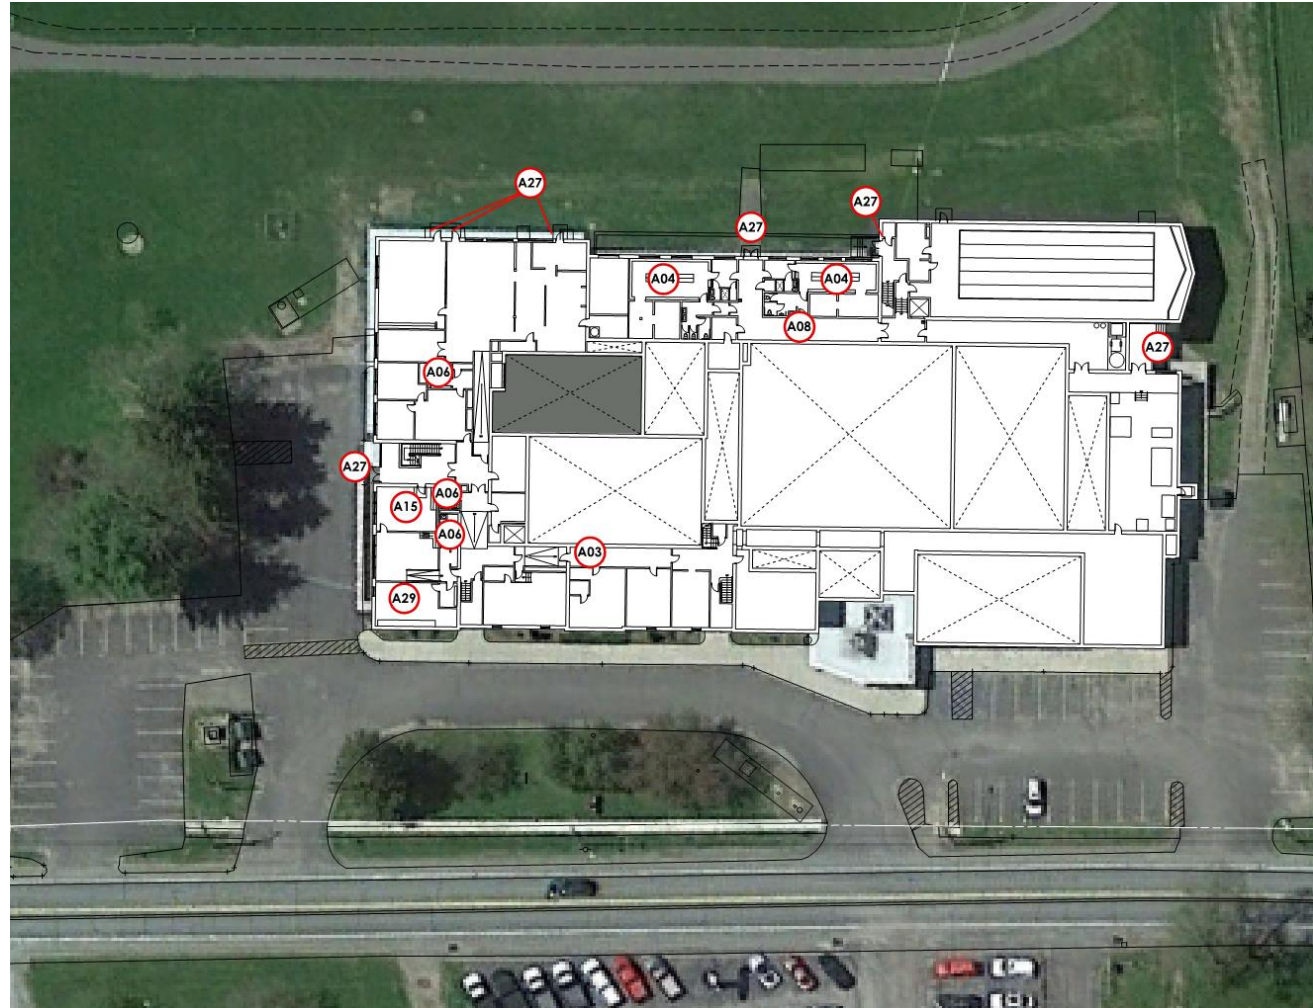

PROPOSED WORK – Jr. Sr. HS

1ST FLOOR


- A01. Remove glass wall and fire shutter and replace with fire rated masonry wall.
- A02. Relocate electrical panel in Room 105 closet to corridor side.
- A03. Seal existing fire rated walls - where found – (Allowance)
- A06. Renovate toilet rooms; faucets, dryers, fixtures etc.
- A07. Add tactile signage throughout the Building – To meet ADA Requirements (Corridors Only).
- A08. Replace water fountains. 7 Locations
- A09. Install expansion joint at cracked floor (RMs 131-133).
- A10. Replace outdated kitchen equipment and related work.
- A11. Remove and Replace casework in 1929 building (RM 105, 111, 202, 204, 206, 218).
- A13. Replace classroom doors and frames in 1929 building. Provide Fire Rated Door and Frames (20 Locations).
- A14. Replace flooring in corridors and nurse's office.
- A23. Replace pool spectator windows in 1st floor lobby.
- A26. Renovate Home & Careers Classroom (RM 141-142)
- A27. Replace exterior doors. – 20 leaves
- A28. Add lockdown hardware system at corridor door - Building Wide
- A30. Replace Fire Alarm System panel only, provide carbon monoxide detectors in spaces with fuel source.

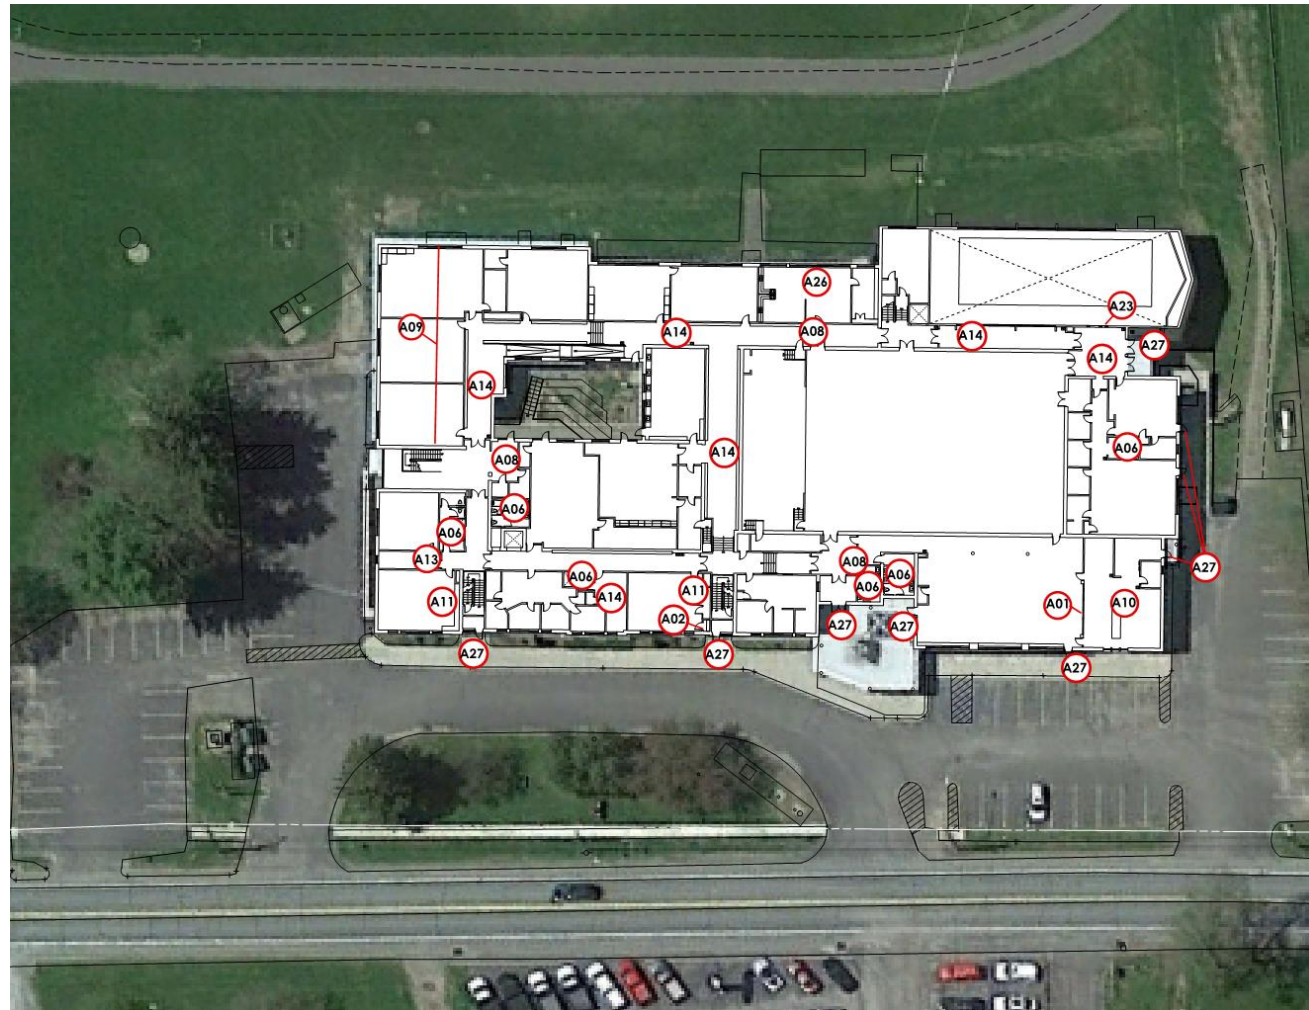

PROPOSED WORK – Jr. Sr. HS

2ND FLOOR

- A03. Seal existing fire rated walls - where found – (Allowance)
- A05. Repair exterior cornice at courtyard.
- A06. Renovate toilet rooms; faucets, dryers, fixtures etc.
- A07. Add tactile signage throughout the Building – To meet ADA Requirements (Corridors Only).
- A08. Replace water fountains. 7 Locations.
- A11. Remove and Replace casework in 1929 building. (RM 105, 111, 202, 204, 206, 218).
- A12. Kiln to be relocated to a new rated/code compliant location
- A13. Replace classroom doors and frames in 1929 building. Provide Fire Rated Door and Frames (20 locations).
- A28. Add lockdown door hardware system at corridor doors - Building Wide
- A30. Replace Fire Alarm System panel only, provide carbon monoxide detectors in spaces with fuel source.

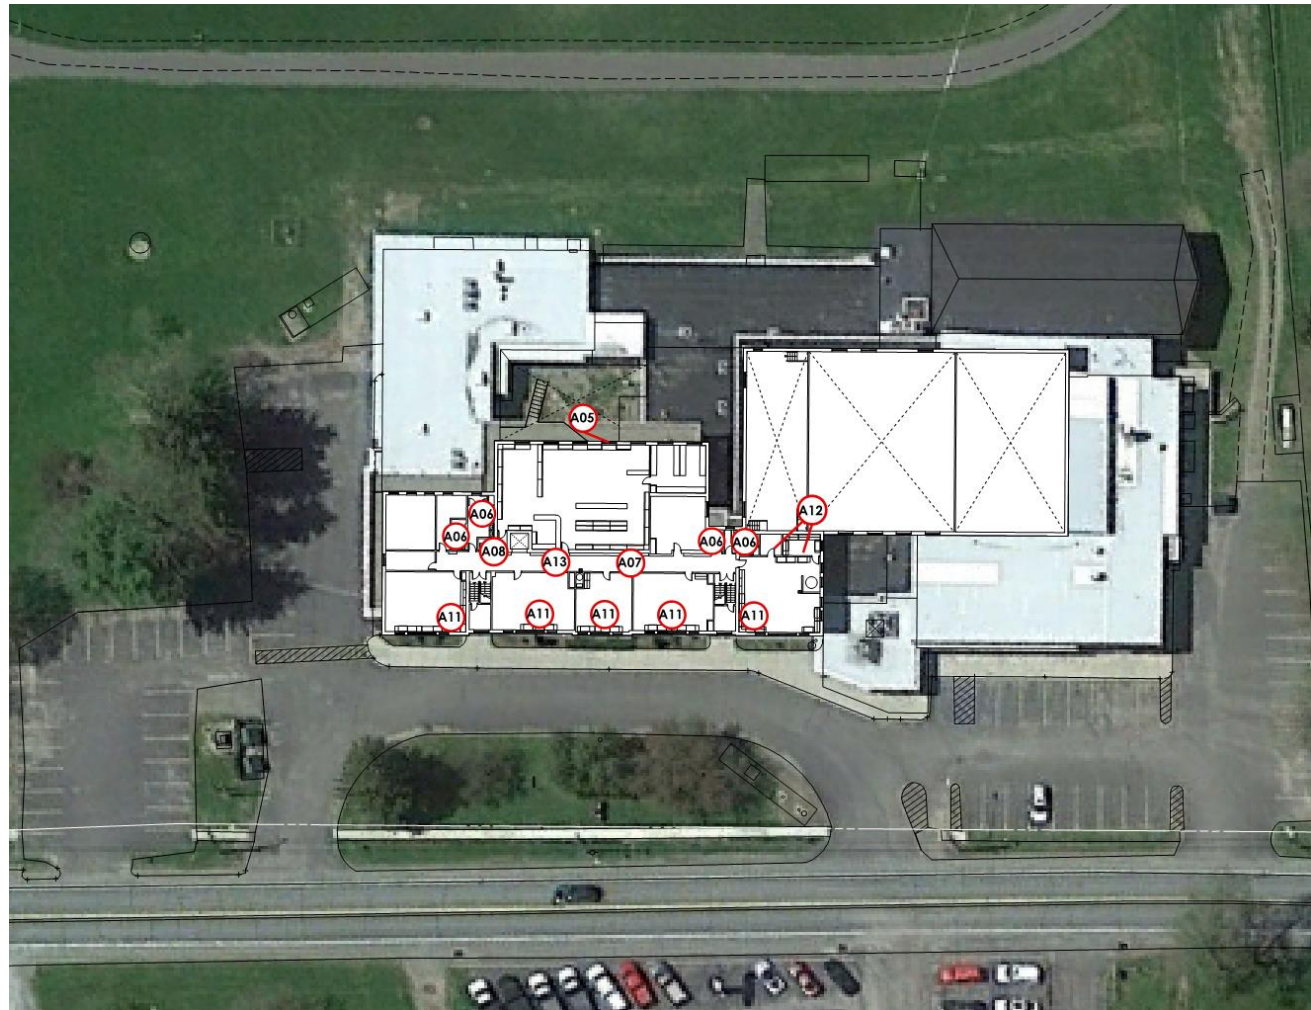

SITE WORK – Jr. Sr. HS

SITE WORK

- A16.** Replace existing Maintenance Building with new metal building.
- A17.** Replace pavement North & South parking lots
- A18.** Pave parking lot at demolished building site and provide entrance according to state highway regulations.
- A19.** Athletic improvements (replace baseball backstop, provide paved ADA access to ball field)
- A20.** Resurface long jump event area at existing track
- A21.** Install lighting at lower parking lot. (@ Old Bus Garage)
- A22.** Update and Improve Exterior building Lighting and Add exterior emergency lighting system for Code Compliance
- A24.** Exterior brick restoration allowance (repointing, cleaning, etc.)
- A25.** Repair cracks in foundation walls. - Front of Building (South Side)

